

helios & helios led (ip42)

universal, one-sided emergency lighting fitting

Materials:

- white polycarbonate body
- transparent or opal polycarbonate cover

Mounting:

- wall or ceiling

Specification:

- 230V 50Hz power supply
- Charge time - 24 hours
- Network power supply and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W, compact lamp 11W, 18W or led 1,2 W diodes
- Insulation class II
- Protection level IP42
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 25 m
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications PN-EN 60598, PN-EN 1838
- Optional PT or RS




p. 19



Legend:

SE - non maintained (dark)
SA - maintained (light)
PT - manual test button
RS - rubic monitoring system
AT - autotest
CB - for central battery evg AC/DC
HE - fitting helios IP 42
HEL - fitting helios led IP 42

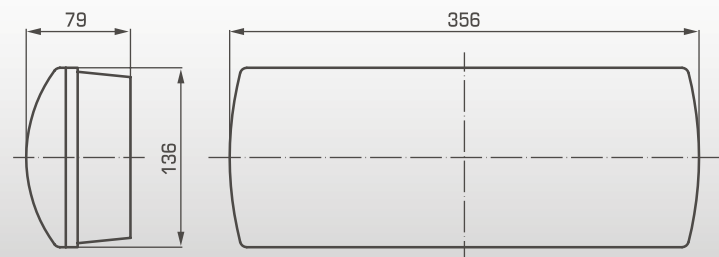

STANDARD

Configuration of fitting

type	time [h]			work		option		power [W]		
HE	1	2	3	SE	SA	PT	RS	8	11	18
HEL	1	2	3	SE	SA	PT	RS	1,2		

AUTOTEST



Configuration of fitting

type	time [h]			work	autotest	power [W]			
HE	1	2	3	SE	SA	AT	8	11	18
HEL	1	2	3	SE	SA	AT	1,2		

CENTRAL BATTERY

Configuration of fitting

type	central bat.	power [W]		
HE	CB	8	11	18
HEL	CB	1,2		



LIGHT SOURCE

Characteristic

power [W]	cup	power [W]	cup
8	G5	18	2G11
11	2G7	LED 1,2	